


**Foot mount Mod. B**

Material: zinc-plated steel.



Supplied with:  
2x feet  
1x front end cap nut  
mod. V

+ = add the stroke

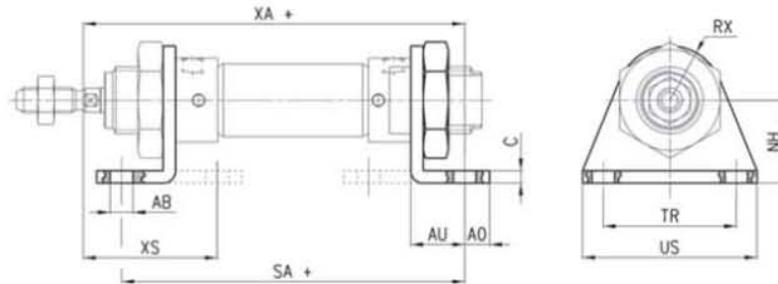


DIMENSIONS												
Mod.	∅	TR	US	AB	C	NH	AO	AU	RX	XA+	SA+	XS
<b>B-8-10</b>	8-10	25	35	4,5	2,5	16	4,5	10,5	10	72,5	67	54
<b>B-12-16</b>	12	32	42	5,5	3	20	6	13	13	82,5	71	64
<b>B-12-16</b>	16	32	42	5,5	3	20	6	13	13	91	82	68
<b>B-20-25</b>	20	40	54	6,6	4	25	8	16	20	108	100	80
<b>B-20-25</b>	25	40	54	6,6	4	25	8	16	20	113,5	101,5	85,5

**Front/rear flange mount Mod. E**

Material: zinc-plated steel.



+ = add the stroke

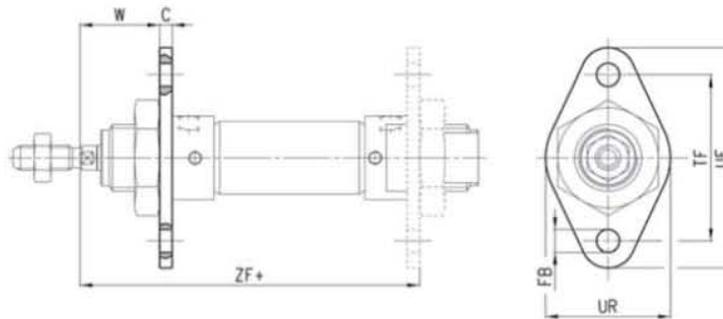

DIMENSIONS								
Mod.	∅	C	FB	TF	UF	UR	W	ZF
<b>E-8-10</b>	8-10	2,5	4,5	30	25	40	13,5	64,5
<b>E-12-16</b>	12	3	5,5	40	30	53	19	75
<b>E-12-16</b>	16	3	5,5	40	30	53	19	81
<b>E-20-25</b>	20	4	6,6	50	40	66	20	96
<b>E-20-25</b>	25	4	6,6	50	40	66	24	101,5

MOVEMENT > Minicylinders Series 16, 24 and 25

CATALOGUE > Release 8.2


1

**Rear trunnion bracket Mod. I**

Material: zinc-plated steel.



+ = add the stroke

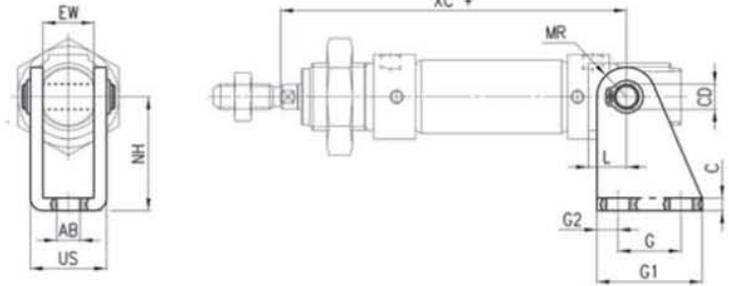


**DIMENSIONS**

Mod.	∅	G1	G	G2	∅CD	∅AB	C	NH	EW	US	MR	XC+	L
I-8-10	8-10	20	12,5	3,5	4	4,5	2,5	24	8	13,1	5	64	6
I-12-16	12	25	15	5	6	5,5	3	27	12	18,1	7	75	9
I-12-16	16	25	15	5	6	5,5	3	27	12	18,1	7	82	9
I-20-25	20	32	20	6	8	6,6	4	30	16	24,1	10	95	12
I-20-25	25	32	20	6	8	6,6	4	30	16	24,1	10	104	12

**Rod fork end Mod. G**

ISO 8140  
Material: zinc-plated steel.

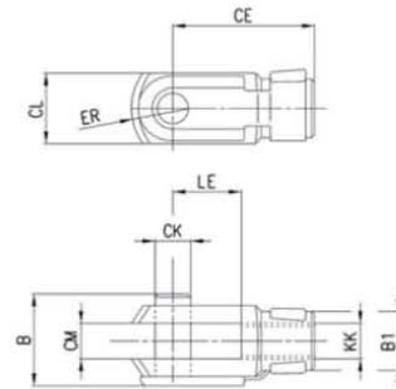


**DIMENSIONS**

Mod.	∅	∅CK	LE	CM	CL	ER	CE	KK	B	∅B1
G-8-10	8-10	4	8	4	8	5	16	M4x0,7	11	8
G-12-16	12-16	6	12	6	12	7	24	M6x1	16	10
G-20	20	8	16	8	16	10	32	M8x1,25	22	14
G-25-32	25	10	20	10	20	12	40	M10x1,25	26	18

**Swivel ball joint Mod. GA**

ISO 8139  
Material: zinc-plated steel.

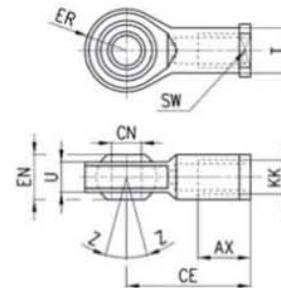


**DIMENSIONS**

Mod.	∅	∅CN <sup>(17)</sup>	U	EN	ER	AX	CE	KK	∅T	Z	SW
GA-12-16	12-16	6	7	9	10	12	30	M6X1	10	6,5°	11
GA-20	20	8	9	12	12	16	36	M8X1,25	12,5	6,5°	14
GA-32	25	10	10,5	14	14	20	43	M10X1,25	15	6,5°	17

**Piston rod socket joint Mod. GY**


ISO 8139  
Material: zama and zinc-plated steel.

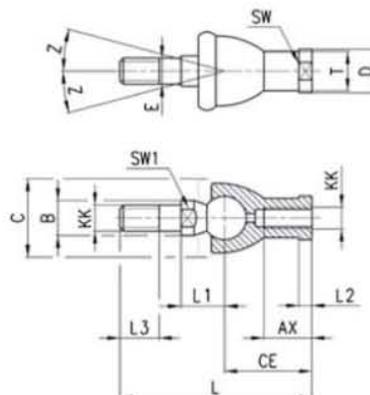

DIMENSIONS																
Mod.	∅	KK	L	CE	L2	AX	E	$e_B$	$e_C$	$e_T$	$e_D$	L1	L3	SW1	SW	Z
GY-12-16	12-16	M6X1	40	28	5	15	6	10	20	10	13	12,2	11	8	11	15
GY-20	20	M8X1,25	65	32	5	16	8	12	24	12,5	16	16	12	10	14	15
GY-25-32	25	M10X1,25	74	35	6,5	18	10	14	28	15	19	19,5	15	11	17	15

**Piston rod lock nut Mod. U**


UNI EN ISO 4035  
Material: zinc-plated steel.



DIMENSIONS				
Mod.	∅	D	m	SW
U-8-10	8-10	M4X0,7	3	7
U-12-16	12-16	M6X1	4	10
U-20	20	M8X1,25	5	13
U-25-32	25	M10X1,25	6	17

**Nose nut Mod.V**

UNI EN ISO 4035  
Material: zinc-plated steel.

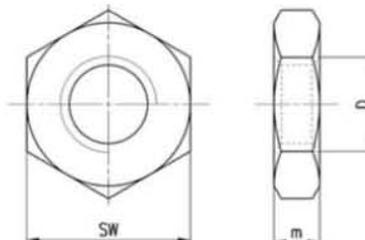

DIMENSIONS				
Mod.	∅	D	m	SW
V-8-10	8-10	M12X1,25	5	19
V-12-16	12-16	M16X1,5	6	24
V-20-25	20-25	M22X1,5	10	32


MOVEMENT > Minicylinders Series 16, 24 and 25

CATALOGUE > Release 8.2

1

Self aligning rod Mod. GK

Material: zinc-plated steel.

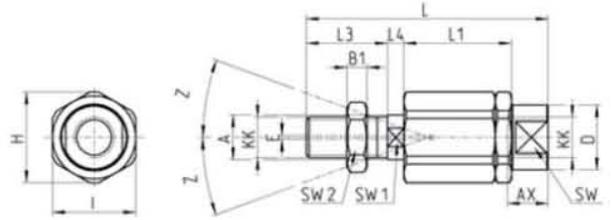


**DIMENSIONS**

Mod.	∅	KK	L	L1	L3	L4	A	∅D	H	I	SW	SW1	SW2	B1	AX	Z	E
<b>GK-20</b>	20	M8x1,25	57	26	21	5	8	12,5	19	17	11	7	13	4	16	4	2
<b>GK-25-32</b>	25-32	M10x1,25	71,5	35	20	7,5	14	22	32	30	19	12	17	5	22	4	2

Coupling piece Mod. GKF

Material: zinc-plated steel.

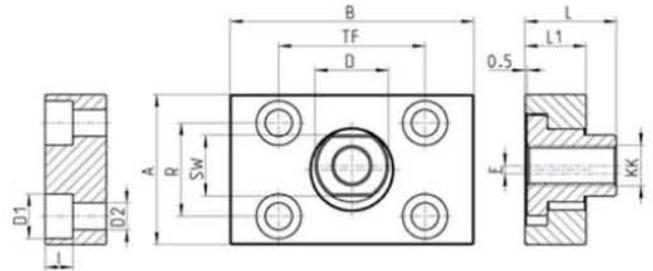

**DIMENSIONS**

Mod.	∅	KK	A	B	R	TF	L	L1	I	∅D	∅D1	∅D2	SW	E
<b>GKF-20</b>	20	M8x1,25	30	35	20	25	22,5	10	-	14	5,5	-	13	1,5
<b>GKF-25-32</b>	25	M10x1,25	37	60	23	36	22,5	15	6,8	18	11	6,6	15	2

MOVEMENT